


ADJUSTMENT WHEN BASE IS CONNECTED TO 8\"/>

ADJUSTMENT WHEN BASE IS CONNECTED TO 12\"/>

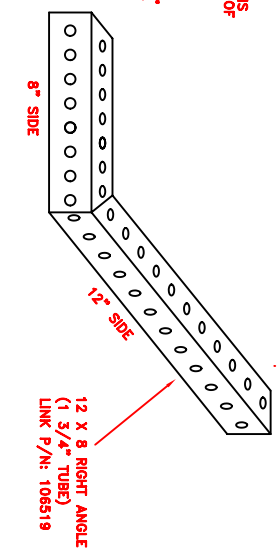

1 ASSEMBLY (5 PCS) FOR EACH MIRROR				
ASSEMBLY P/N	MIRROR LENGTH	BLACK MAX UNIT	VERT. SUPPORT	
900391	28"	18" OR 24"	48"	
900392	40"	30" OR 36"	60"	
900393	52"	42" OR 48"	72"	

FINISH: CARBIDE BLACK

WARNING!
The Link Lite Black Max must be installed so that the distance between its sensing field and the nearest point of operation hazard is greater than or equal to the minimum safety distance which must be calculated by a formula specified by OSHA and ANSI. See latest editions OSHA 1910.217, ANSI B11.1 and B11.9.

DESCRIPTION	QTY	LINK P/N:
ALL NUTS, BOLTS, WASHERS, IN HARDWARE KIT LINK P/N: 106550 (86 PCS)		
BOLTS (HEX 3/8-16 X 2 1/2)	16	106135
WASHERS (3/8 FLAT)	32	103311
NUTS (UNLOCK 3/8-16)	16	102249
MIRROR 45° ADAPT. BRACKET	2	106546
BOLTS (SOCKET 1/4-20 X 7/8)	4	102850
WASHERS (1/4 FLAT)	8	101620
NUTS (1/4-20)	4	103185
LOCK WASHER (1/4 SPURT)	4	102320

NO	DESCRIPTION	DATE	BY
REVISIONS			
The general and/or technical information in this drawing is confidential and is not to be reproduced for others without LINK's prior written consent.			

LINK LITE BLACK MAX MOUNTING BRACKET ASSEMBLY, MIRROR DRAWING P/N: 106617	SCALE 1=4	DATE 5-7-96	CODE IDENT NO 305
DWN BY JCN	CHK BY		DRAWING NUMBER C-305-1127

