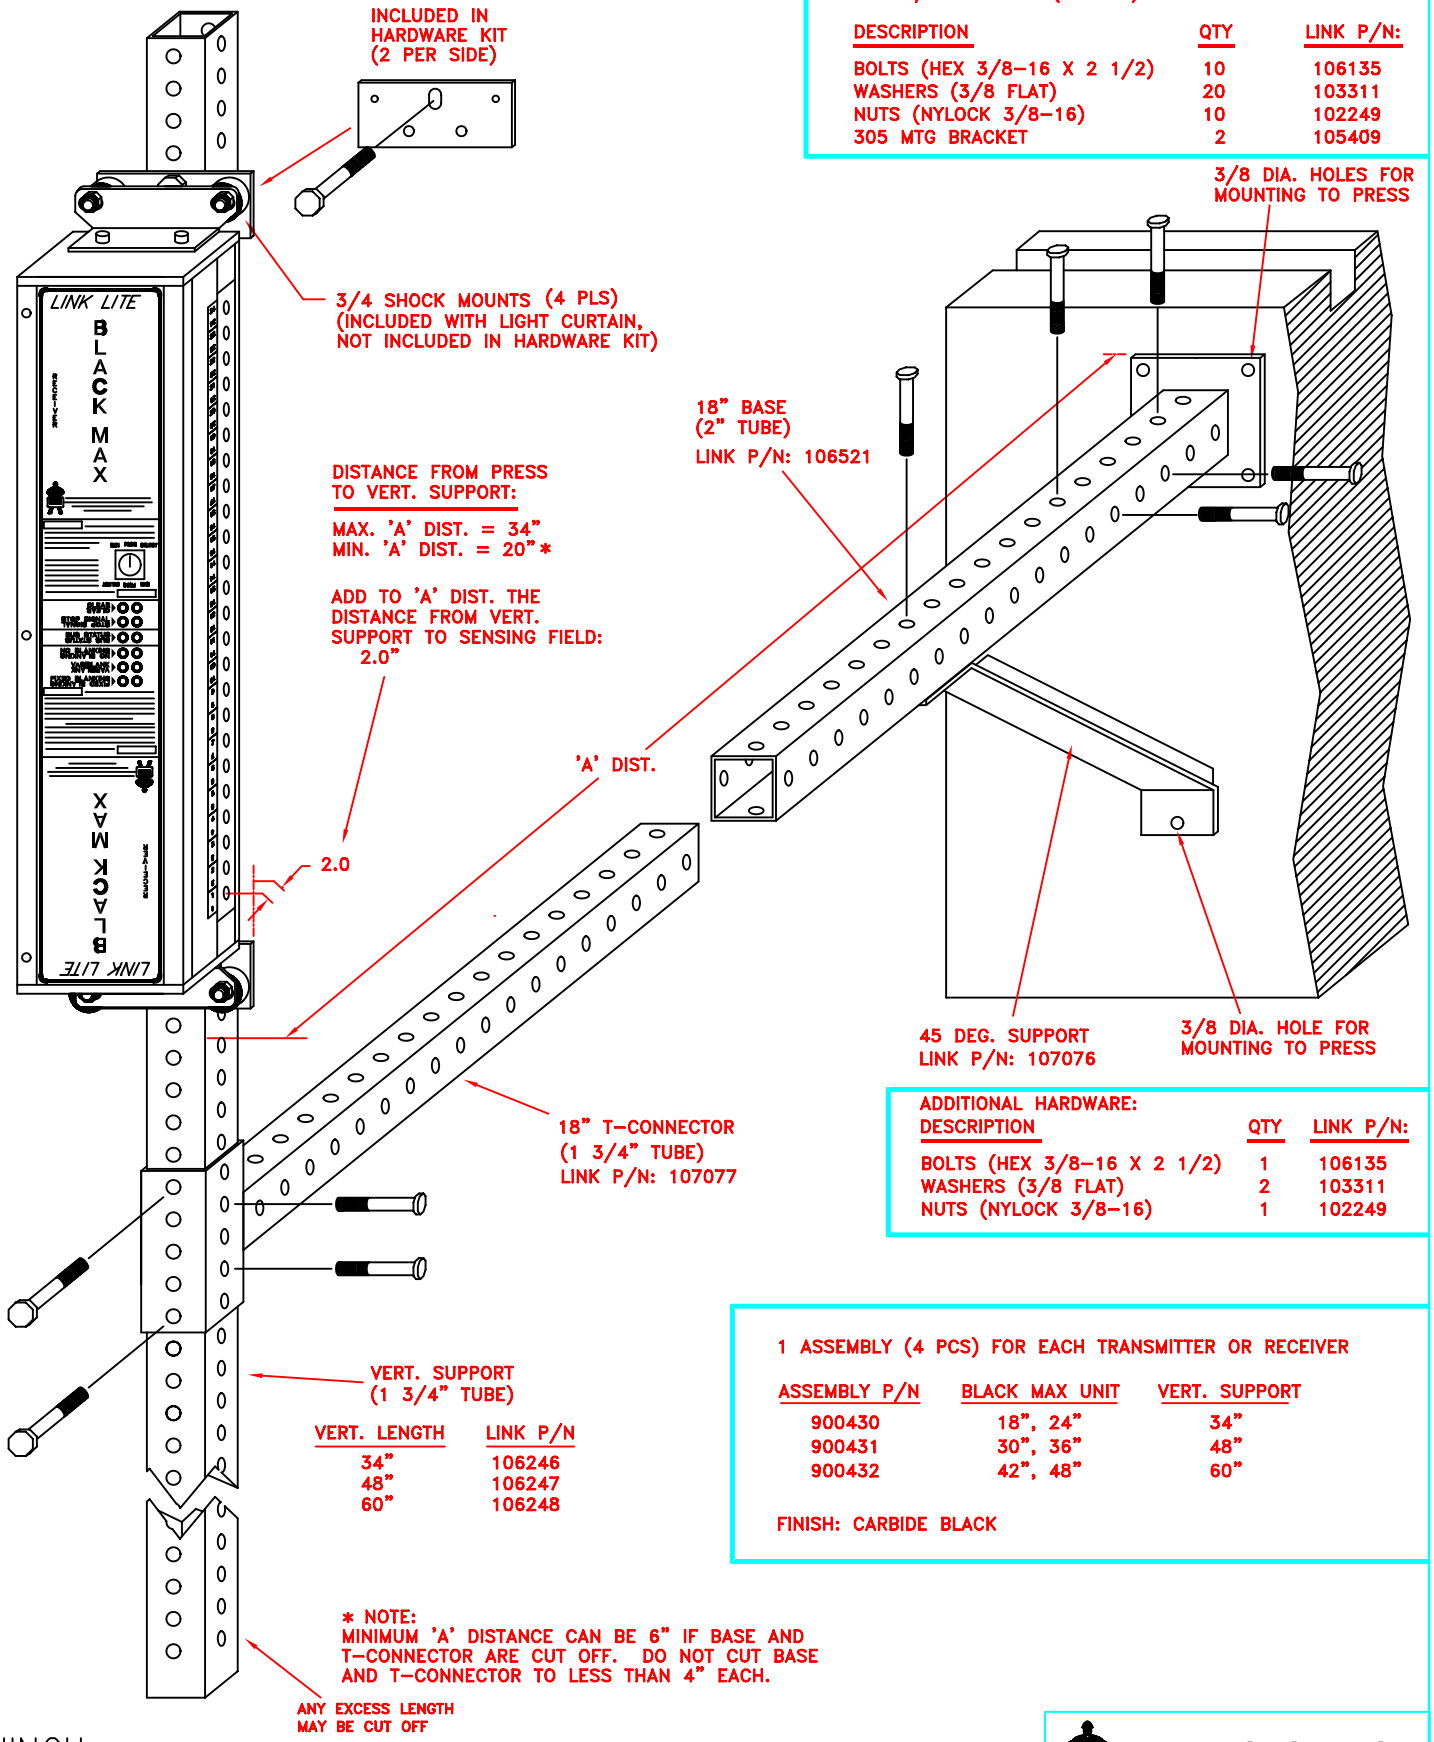

ALL NUTS, BOLTS, WASHERS, IN HARDWARE KIT
LINK P/N: 106535 (42 PCS)

DESCRIPTION	QTY	LINK P/N:
BOLTS (HEX 3/8-16 X 2 1/2)	10	106135
WASHERS (3/8 FLAT)	20	103311
NUTS (NYLOCK 3/8-16)	10	102249
305 MTG BRACKET	2	105409

ADDITIONAL HARDWARE:

DESCRIPTION	QTY	LINK P/N:
BOLTS (HEX 3/8-16 X 2 1/2)	1	106135
WASHERS (3/8 FLAT)	2	103311
NUTS (NYLOCK 3/8-16)	1	102249

1 ASSEMBLY (4 PCS) FOR EACH TRANSMITTER OR RECEIVER

ASSEMBLY P/N	BLACK MAX UNIT	VERT. SUPPORT
900430	18", 24"	34"
900431	30", 36"	48"
900432	42", 48"	60"

FINISH: CARBIDE BLACK

WARNING!!

The Link Lite Black Max must be installed so that the distance between its sensing field and the nearest point of operation hazard is greater than or equal to the minimum safety distance which must be calculated by a formula specified by OSHA and ANSI. See latest editions OSHA 1910.217, ANSI B11.1 and B11.9.

NO	DESCRIPTION	DATE	BY

REVISIONS

This drawing and/or technical information is the property of LINK ELECTRIC & SAFETY CONTROL CO. This is submitted in confidence and is not to be reproduced for others without LINK's prior written consent.

LINK SYSTEMS
LINK ELECTRIC & SAFETY CONTROL CO.
444 McNally Dr. • Nashville, TN. 37211

LINK LITE BLACK MAX MOUNTING BRACKET ASSEMBLY, STRAIGHT EXTENDED
DRAWING P/N: 102366

SCALE	DATE	CODE IDENT NO
1=3	6-30-97	305

DWN BY	CHK BY	DRAWING NUMBER
JCN		C-305-1146